
## 6800 Series Dissipative Rubber Mats and Runners

The 6800 Series Static Dissipative Rubber Mats and Runners meets ANSI/ ESD S20.20 worksurface required limit (and recommendation of ANSI/ESD S4.1), tested per ANSI/ESD S4.1 and ESD TR53. The 6800 Series mats provide the durability you expect from a dual-layer rubber mat at a very competitive cost. Featuring a smooth finish, the 6800 Series Static Dissipative Rubber Mats and Runners are available in blue/black and gray/black colors, and feature standard sizes in 2 feet, 3 feet and 4 feet widths and 50 feet lengths. In addition, they are also available in 2 feet x 4 feet cut mats in blue/black and gray/black, including snaps.



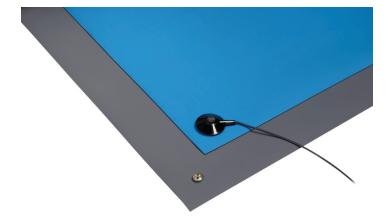

Properties	Typical Value	Test Method
Material	Nitrile	
Thickness*	0.072" (1.8 mm)	
Color* (Top / Bottom)	Blue / Black Gray / Black	
Hardness (top)	65 Shore A	
*Resistances Surface to Ground (Rtg) Surface to Surface (Rtt)	<10 <sup>9</sup> ohms <10 <sup>9</sup> ohms	ANSI/ESD S4.1 ANSI/ESD S4.1
Tolerance	Width +/- 0.250" Length +/- 0.250"	

<sup>\*</sup>Color, texture and thickness may vary between lots and mills.

## **Table Mat Kit Item Numbers**

Size	Blue	Gray
2' X 4'	<u>6811</u>	<u>6810</u>
(0.6 m X 1.2 m)		

## Table Mat Kit Includes:

- 1 Table Mat, size as specified
- 2 3034 Snap Fasteners (installed)

## **Runner Item Numbers**

Size	Blue	Gray
2' x 50' (0.6 m x 15.2 m)	<u>6841</u>	<u>6840</u>
3' x 50' (0.9 m x 15.2 m)	<u>6861</u>	<u>6860</u>
4' x 50' (1.2 m x 15.2 m)	<u>6871</u>	<u>6870</u>

Mat rolls need to be unrolled before being cut. When rolled, some shrinkage may occur. Please allow time for mat to relax at room temperature 24-48 hours prior to cutting.

Made in China

Specifications and procedures subject to change without notice.

6800 SERIES DISSIPATIVE RUBBER MATS AND RUNNER	S
--	---



926 JR Industrial Drive, Sanford, NC 27332

WEB SITE: StaticControl.com PHONE (919) 718-0000 DRAWING NUMBER 6800 August 2015